


## ex-IGA SERIES PHOTODIODE

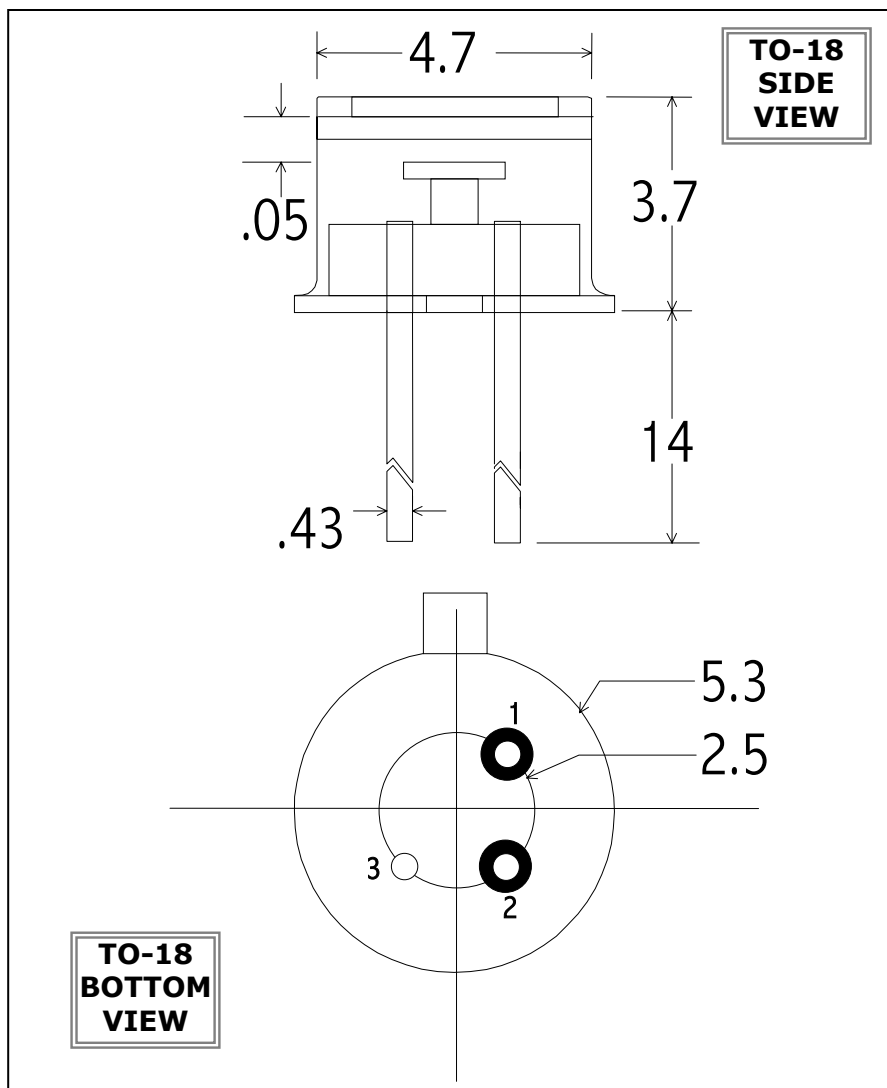

**Part No:** IGA1.9 - 010

**PIN OUT**

- 1 = ANODE
- 2 = CATHODE
- 3 = CASE

**Note:**

*Dimensions in millimeters*

### Application Note

**ELECTRO OPTICAL SYSTEMS** offers room temperature InGaAs photodiode detectors for operation in the 1.2 - 2.6  $\mu\text{m}$  spectral range. The units have state-of-the-art sensitivity and may be supported by accessories such as optical filters (longpass and bandpass), integral preamplifiers, and fiber optic connectors. These units find applications in industrial control systems, gas analyzers, thermal sensors, and general fiber optic test instrumentation.

### SPECIFICATIONS

Active Area	1.0 mm dia
Operating Wavelength - $\mu\text{m}$	1.2 - 2.1
Shunt Resistance ( $\text{k}\Omega$ )	> 100 k
Shunt Capacitance ( $\text{pF}$ ), typ	100
Responsivity ( $\text{A/W}$ ) @ 2.2 $\mu\text{m}$	1.2
NEP ( $\text{W/Hz}^{1/2}$ ) @ 2.2 $\mu\text{m}$ , 100Hz	< $4.0 \times 10^{-13}$