


## THERMOELECTRICALLY COOLED PHOTODIODE

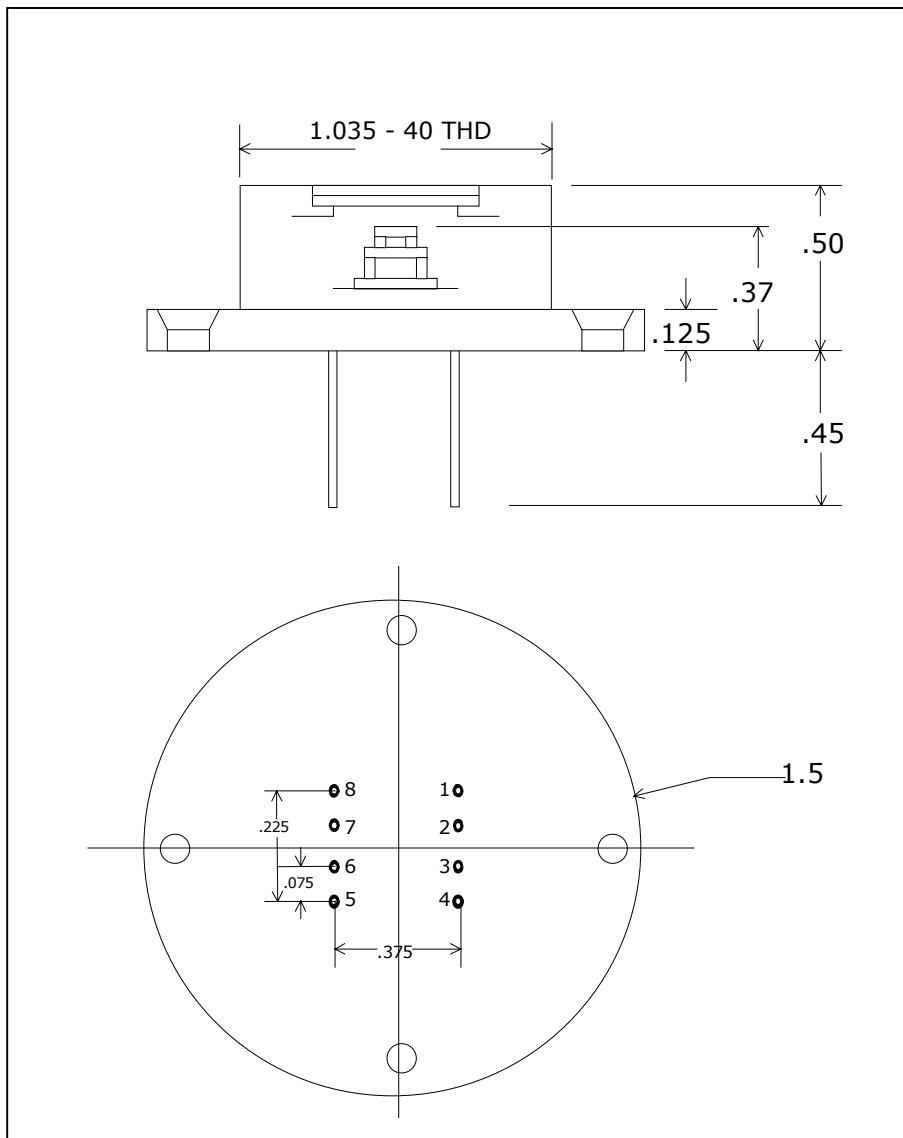

### Part No:

**UVS-100-TE2**

### PIN FUNCTION

- 1 = Cooler (-)
- 2 = Thermistor
- 3 = Thermistor
- 4 = Cooler (+)
- 5 = Detector Cathode
- 6 = Detector Anode
- 7 = No Connect
- 8 = No Connect

### Note:

Dimensions in Inches

## SPECIFICATIONS

Detector Type	10 mm x 10 mm UV Silicon Photodiode	
Temperature (°C)	22	-30
R <sub>shunt</sub>	50 M ohms min	10 <sup>9</sup> ohms min
C <sub>shunt</sub>	1800 pf typ	1600 pf typ
NEP @ 800 nm	< 5.0 x 10 <sup>-14</sup>	< 1.0 x 10 <sup>-14</sup>
Responsivity (A/W)	0.5 min @ 800 nm	0.5 min @ 800 nm
Cooler Current (A), typ	0.0	0.7
Thermistor Resistance (kΩ)	1.5	40.0